

ZLX

G2
PORTABLE
LOUDSPEAKERS

READY FOR YOU

GRAVITY
Electro-Voice user

OUR
ELECTRO-VOICE
COMMUNITY



TAKE YOUR PICK

Powered or passive,
available in three
sizes – find the
footprint that fits
your needs



STEP UP

The next generation
of ZLX portable
loudspeakers
brings you the best
performance, features
and connectivity at
their price point



LOADED

Pro feature set
including app
control/mixing,
stereo streaming,
customizable presets,
effects, ducking
and AFS (automatic
feedback suppression)



ZLX G2


PACKS A SONIC PUNCH THAT'S WORTHY OF THE ELECTRO-VOICE NAME

Building on the best of what made the original ZLX series an industry icon, the ZLX G2 lineup offers a range of next-level features and functionality and includes 8" (new for the series), 12" and 15" two-way models in both powered and passive versions.



WIRELESS CONTROL & MONITORING

Use the free EV QuickSmart Mobile app to adjust all audio, effects and mix functions via your phone or tablet. An intuitive user interface makes it simple to shape your sound to the space, so you can focus on the show.

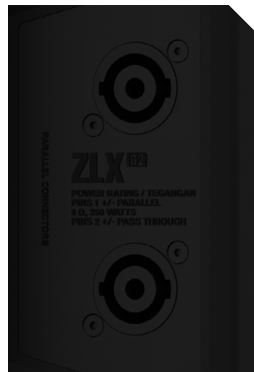

Position	Pole-mounted / monitor	Pole-mounted / monitor / kick-back	Pole-mounted / monitor / kick-back
Monitor / kick-back angles	55° / —	55° / 23°	55° / 23°
Coverage (H x V)	90° x 60°		
Material	Polypropylene		
Colors	Black		
Dimensions (W x H x D)	289.9 mm x 459.6 mm x 280.5 mm (11.41" x 18.09" x 11.04")	356.2 mm x 621.1 mm x 356 mm (14.02" x 24.45" x 14.01")	422.8 mm x 697.6 mm x 383.1 mm (16.65" x 27.46" x 15.08")
Installation options	Pole mount brackets	Pole mount bracket Wall mount bracket	Pole mount bracket Wall mount bracket
Accessories	8" padded cover Short pole wall-mount bracket Long pole wall-mount bracket	12" padded cover Wall-mount bracket Long pole wall-mount bracket	15" padded cover Wall-mount bracket Long pole wall-mount bracket

POWERED

	ZLX-8P-G2	ZLX-12P-G2	ZLX-15P-G2
HF transducer	1.4" DECA2516 titanium compression driver		
LF transducer	8" WECA2088 ferrite	12" WECA2128 ferrite	15" WECA2158 ferrite
Power rating (peak)	1000 W		
SPL max	126 dB	127 dB	129 dB
Frequency range (-10 dB)	50 Hz - 20 kHz	48 Hz - 20 kHz	42 Hz - 20 kHz
Digital signal processing	QuickSmart DSP features best-in-class processing. Easy setup via presets, sub/top system-match, three-band input EQ, seven-band output PEQ/GEO, five user-programmable presets, visual monitoring of limiter status, input level control and meters, and master volume control to optimize gain structure, all via the full-color LCD.		
Remote control and monitoring	EV Quick Smart Mobile application: quickly and wirelessly configure, control and monitor up to six ZLX G2 loudspeakers simultaneously, and receive immediate notification during critical performance conditions.		
Bluetooth® audio streaming and true wireless stereo	☒		
Crossover frequency	1.40 kHz		
Connectors	2x XLR/TRS combo inputs	1x ¼" TS Hi-Z input	1x XLR mix out
Weight	10.64 kg (23.46 lbs)	14.82 kg (32.67 lbs)	16.78 kg (37 lbs)

PASSIVE

	ZLX-8-G2	ZLX-12-G2	ZLX-15-G2
HF transducer	1.4" DH-1K titanium compression driver		
LF transducer	8" WECA2088 ferrite	12" WECA2128 ferrite	15" WECA2158 ferrite
Power handling	250 W continuous, 1000 W peak		
SPL max	124 dB	125 dB	126 dB
Frequency range (-10 dB)	55 Hz - 20 kHz	55 Hz - 20 kHz	53 Hz - 20 kHz
Crossover frequency	2 kHz		
High-pass frequency	60 Hz	48 Hz	40 Hz
Connectors	Dual NL4		
Weight	10.15 kg (22.38 lbs)	14.26 kg (31.44 lbs)	16.44 kg (36.24 lbs)
Recommended Dynacord amplifier	L1800FD, L2800FD	L1800FD, L2800FD	L1800FD, L2800FD



Please visit electrovoice.com/zlx-g2 for more detailed information.

EV QuickSmart Mobile available in select countries. Apple, the Apple logo, iPhone®, iPad®, and App Store® are trademarks of Apple Inc., registered in the U.S. and other countries. Google Play and the Google Play logo are trademarks of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Bosch Security Systems, LLC is under license. Information in this document is subject to change without notice. ©2024 Bosch Security Systems, LLC